
# Triple D Flip-Flop With Set and Reset

The MC100LVEL30 is a triple master–slave D flip flop with differential outputs. The MC100EL30 is pin and functionally equivalent to the MC100LVEL30 but is specified for operation at the standard 100E ECL voltage supply. Data enters the master latch when the clock input is LOW and transfers to the slave upon a positive transition on the clock input.

In addition to a common Set input individual Reset inputs are provided for each flip flop. Both the Set and Reset inputs function asynchronous and overriding with respect to the clock inputs.

- 1200MHz Minimum Toggle Frequency
- 20-Lead SOIC Packaging
- 550ps Typical Propagation Delays
- · Set and Reset Inputs
- Supports both Standard and Low Voltage 100K ECL
- Internal Input Pulldown Resistors
- >2000V ESD Protection

#### Logic Diagram and Pinout: 20-Lead SOIC (Top View)

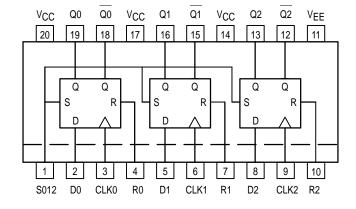

# MC100LVEL30 MC100EL30



#### **TRUTH TABLE**

R	S	D	CLK	Q	Ια
тгтгг	ттггг	L H X X	Z Z X X	L H L H Undef	H L H L Undef

Z = LOW to HIGH Transition

#### **PIN NAMES**

Pins	Function
D0-D2	Data Inputs
R0-R2	Reset Inputs
CLK0-CLK2	Clock Inputs
S012	Common Set Input



## MC100LVEL30 MC100EL30

#### MC100LVEL30

**DC CHARACTERISTICS** ( $V_{EE} = -3.0V \text{ to } -3.8V; V_{CC} = GND$ )

		-40°C			0°C			25°C			85°C			
Symbol	Characteristic	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Unit
IEE	Power Supply Current		55	62		55	62		55	62		55	64	mA
lн	Input HIGH Current			150			150			150			150	μΑ

#### MC100LVEL30

AC CHARACTERISTICS ( $V_{EE} = -3.0V$  to -3.8V;  $V_{CC} = GND$ )

		–40°C			0°C			25°C			85°C			
Symbol	Characteristic	Min	Тур	Max	Unit									
fMAX	Maximum Toggle Frequency	1.0			1.2			1.2			1.2			GHz
<sup>t</sup> PLH <sup>t</sup> PHL	Propagation Delay CLK to Output S, R	460 470		690 710	470 480		700 720	480 490		710 730	500 515		730 755	ps
ts tH	Setup Time Hold Time	150 200	0 100		ps									
<sup>t</sup> RR	Set/Reset Recovery	400	200		400	200		400	200		400	200		ps
tpW	Minimum Pulse Width CLK Set, Reset	400 650			400 650			400 650			400 650			ps
t <sub>r</sub> t <sub>f</sub>	Output Rise/Fall Times Q (20% – 80%)	280		550	280		550	280		550	280		550	ps

#### MC100EL30

**DC CHARACTERISTICS** ( $V_{EE} = -4.2V \text{ to } -5.5V; V_{CC} = GND$ )

		−40°C			0°C			25°C			85°C			
Symbol	Characteristic	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Min	Тур	Max	Unit
I <sub>EE</sub>	Power Supply Current		55	62		55	62		55	62		55	64	mA
ΊΗ	Input HIGH Current			150			150			150			150	μΑ


### MC100EL30

AC CHARACTERISTICS ( $V_{EE} = -4.2V$  to -5.5V;  $V_{CC} = GND$ )

		-40°C			0°C			25°C			85°C			
Symbol	Characteristic	Min	Тур	Max	Unit									
f <sub>MAX</sub>	Maximum Toggle Frequency	1.0			1.2			1.2			1.2			GHz
<sup>t</sup> PLH <sup>t</sup> PHL	Propagation Delay CLK to Output S, R	460 470		690 710	470 480		700 720	480 490		710 730	500 515		730 755	ps
t <sub>S</sub> t <sub>H</sub>	Setup Time Hold Time	150 200	0 100		ps									
<sup>t</sup> RR	Set/Reset Recovery	400	200		400	200		400	200		400	200		ps
tPW	Minimum Pulse Width CLK Set, Reset	400 650			400 650			400 650			400 650			ps
t <sub>r</sub> t <sub>f</sub>	Output Rise/Fall Times Q (20% – 80%)	280		550	280		550	280		550	280		550	ps

MOTOROLA 4–2

#### **OUTLINE DIMENSIONS**

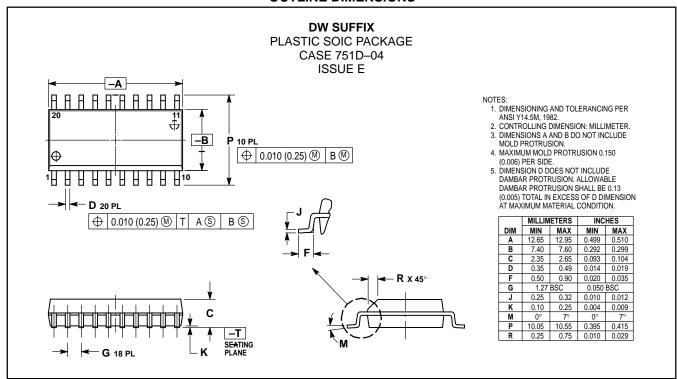

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and was negligent regarding the design or manufacture of the part. Motorola and Parameters of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

#### How to reach us:

**USA/EUROPE/Locations Not Listed**: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

**MFAX**: RMFAX0@email.sps.mot.com – TOUCHTONE 602–244–6609 **INTERNET**: http://Design=NET.com

JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298



MC100LVEL30/D

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from:

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com